




BROMIC[®]
HEATING

PLATINUM
SMART-HEAT™ GAS

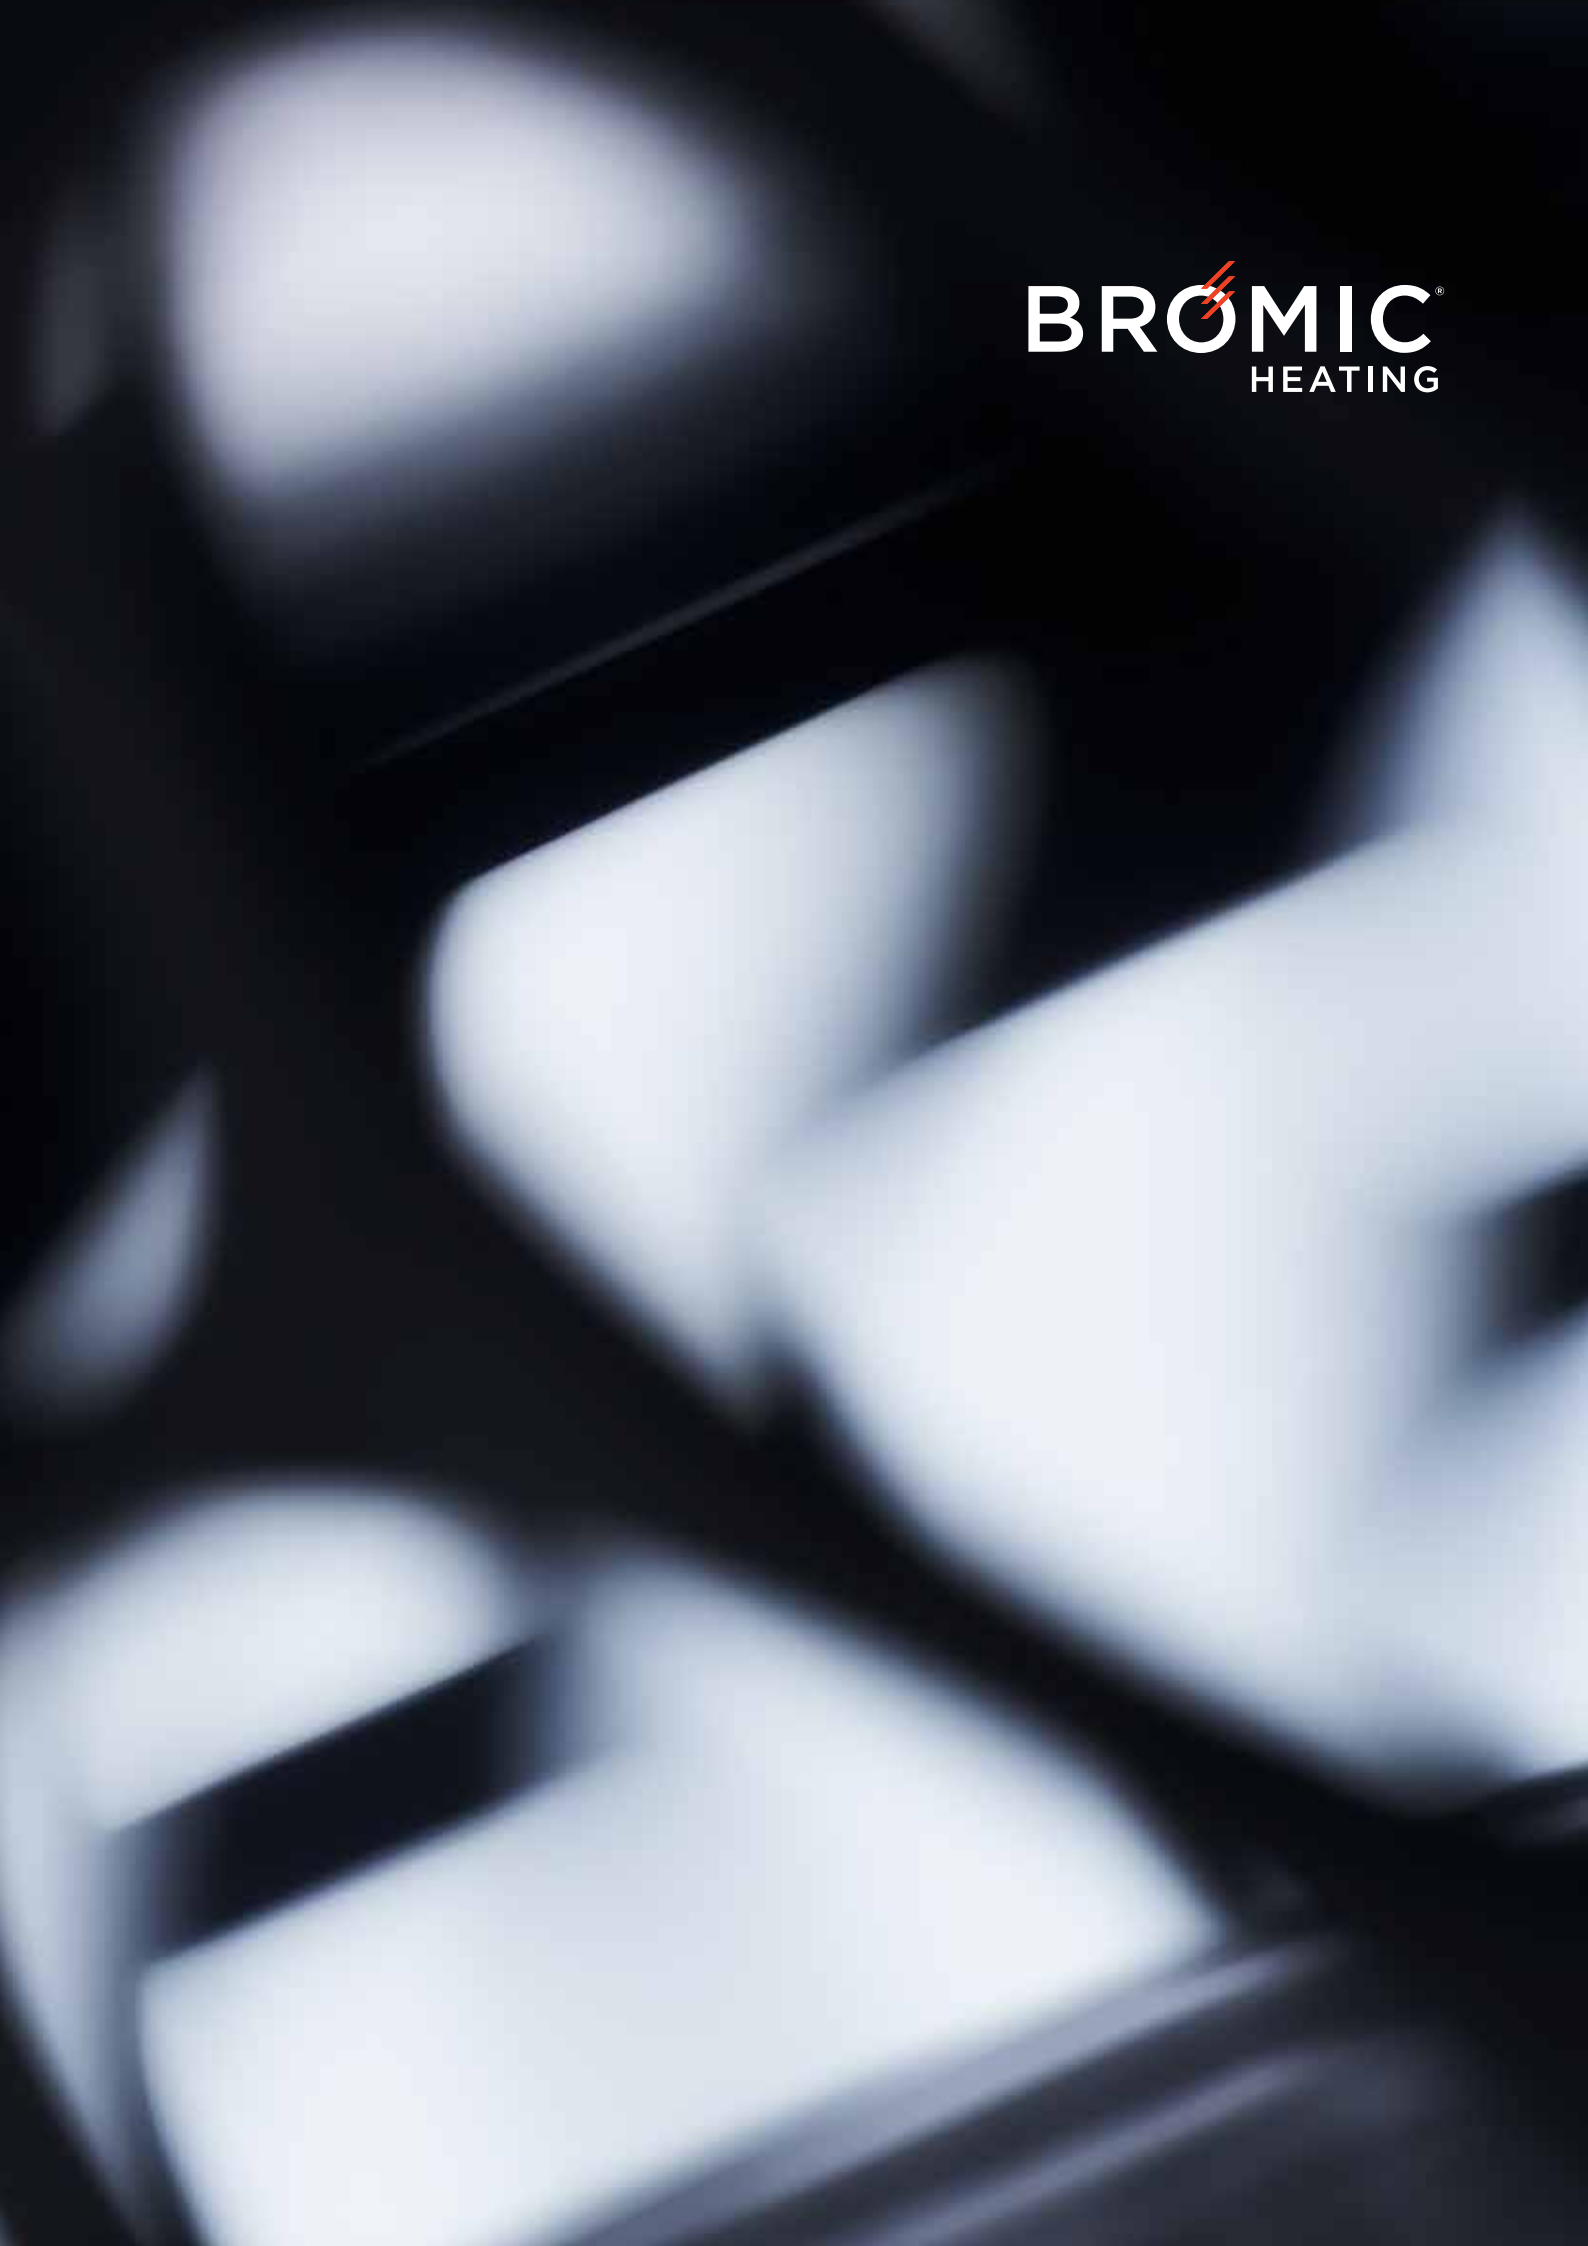


The Platinum Smart-Heat™ Gas heater series spreads heat and comfort evenly in all areas, with a soft and soothing red glow. Built with pure premium materials and designed with elegance, there is no compromise on performance, reliability and beauty.

SEAMLESS INTEGRATION OF
MODERN CLEAN LINES, MINIMALISTIC
DESIGN AND QUALITY MATERIALS
ACHIEVES INNOVATIVE STYLING AND
TECHNICAL PERFORMANCE.

BRÖMIC

PLATINUM SMART-HEAT™ ELECTRIC
WITH OPTIONAL RECESS KIT

PLATINUM
SMART-HEAT™ ELECTRIC

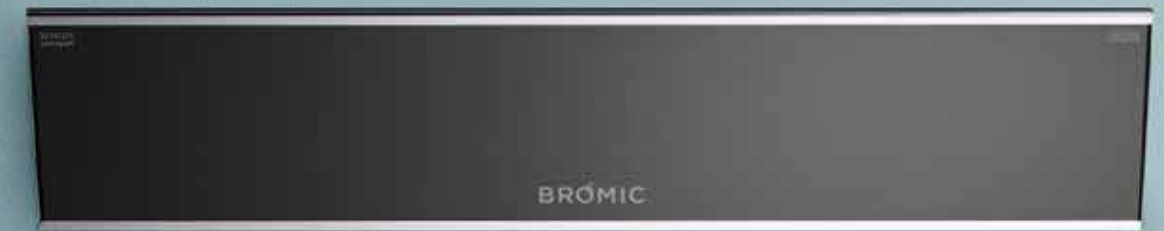


Available in black and white, our Platinum Smart-Heat™ Electric heater is specifically suited for low-clearance and design-focused spaces in mind. This slim-line, stainless steel unit spreads comfort evenly in its space, all while minimising light emission and blending seamlessly into the background with our recess mounting solutions.




OUR DEDICATION TO INNOVATION IN
QUALITY AND DESIGN, ALLOWS US TO
SOLVE A WIDE ARRAY OF REAL-WORLD
CHALLENGES SUCH AS CLIMATE,
EFFICIENCY AND ENVIRONMENT.

TUNGSTEN SMART-HEAT™ GAS

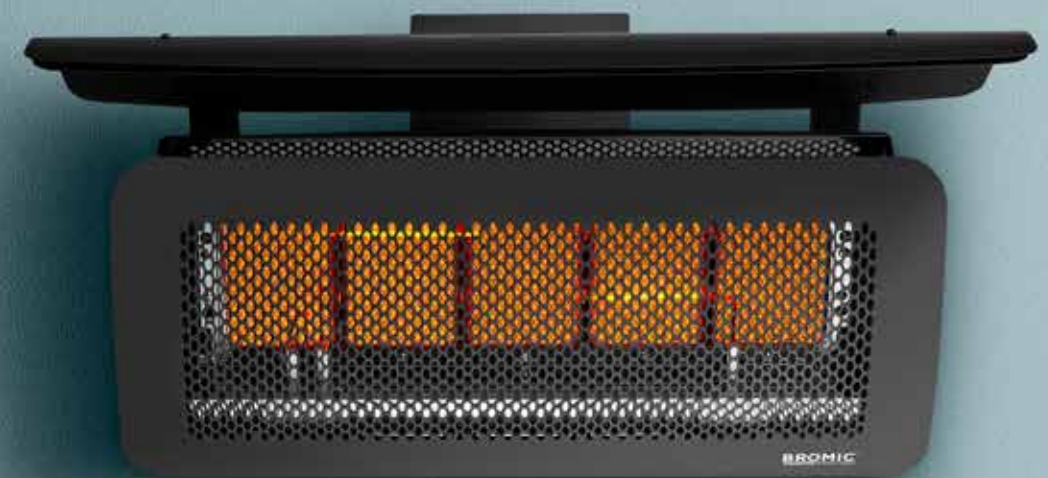

Our Tungsten Smart-Heat™ Gas heater has a durable, soft flowing curved fascia and engineered body, which produces formidable heat to create a truly comfortable outdoor space. Its easy pivot arm allows for greater positioning and directional heat control. This heater also has a range of accessories available to provide versatility in mounting & controller options.

TUNGSTEN SMART-HEAT™ ELECTRIC

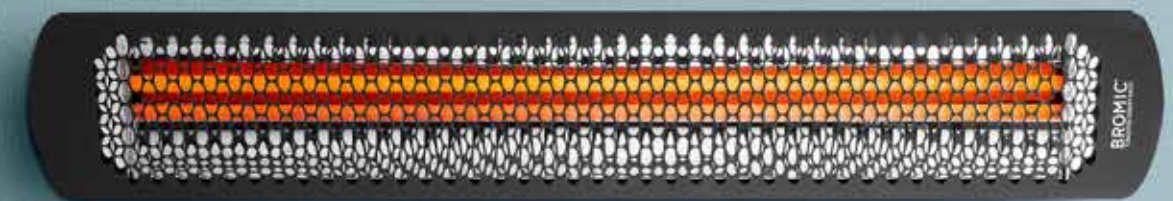

Our Tungsten Smart-Heat™ Electric series offers high performance radiant heating to outdoor and semi-enclosed spaces alike, with an industrial design style. It also boasts a high-temperature coating to suit all environments. With a stainless-steel construction, its durable element will emit a soft red glow to create a warm ambience in your space.



TUNGSTEN SMART-HEAT™ PORTABLE

It's neutral black finish, and award-winning design makes it a piece of modern art. The Tungsten Smart-Heat™ Portable heater offers efficient directional heat and a versatile heating solution for the outdoor settings. It's modular construction with built-in wheels allows for easily manoeuvrability throughout tighter spaces.

SMART-HEAT™ WIRELESS CONTROLLERS

With the option to connect groups of heaters from a single point as well as dimming heating outputs, the Smart-Heat™ range of controllers provide a simple, yet powerful solution to controlling your environment.

Learn more about our wireless control options
bromic.com/gowireless



DESIGN SERVICE

As part of our complementary service, Bromic Heating Specialists will custom design and tailor a solution to best heat your outdoor living and entertainment spaces.

Learn more about our design service
bromic.com/designservice



PLATINUM

SMART-HEAT™ GAS

MODEL NUMBER	300 SERIES	500 SERIES
FUEL TYPE	LPG NG	LPG NG
COLOUR	BLACK	BLACK
HEAT AREA	15M²	20M²
ELECTRICAL CONNECTION	220 - 240 Va.c.	220 - 240 Va.c
MINIMUM FLOOR CLEARANCE	2,000MM	2,000MM

MOUNTING OPTIONS


CEILING MOUNT	X	X
WALL MOUNT	X	X
RECESSED FLUSH MOUNT	-	-
CEILING POLE MOUNT	X	X
FREESTANDING	-	-

CONTROL OPTIONS



ON OFF	X	X
DIMMER	-	-
MASTER REMOTE	-	-

Measurements displayed within this catalogue are minimum requirements for installation.
Bromic takes no responsibility for incorrect or non-compliant installations.
All measurement in this catalogue are displayed in mm.


PRODUCT MEASUREMENTS
500 SERIES

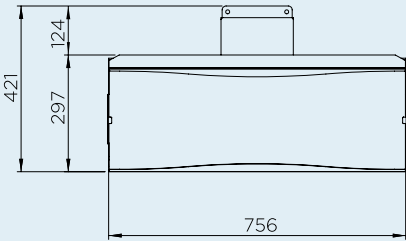



300 SERIES



PRODUCT MEASUREMENTS
WITH HEAT DEFLECTOR
500 SERIES

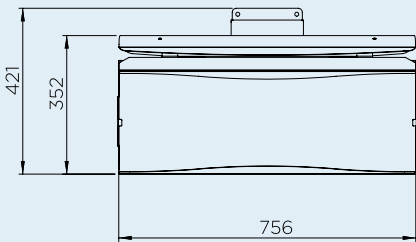


300 SERIES

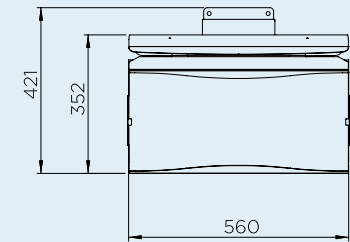


WALL MOUNT
OPTIONS

WALL MOUNT
CLEARANCE

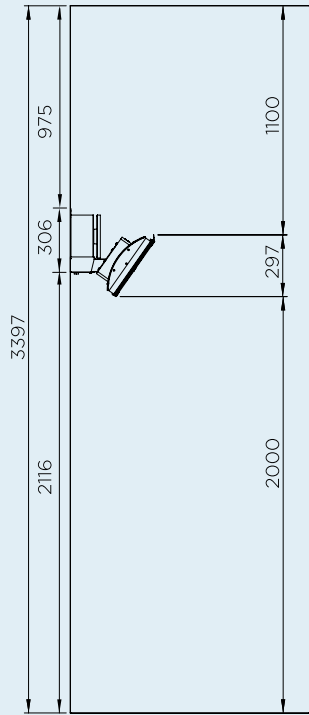


WALL MOUNT
CLEARANCE
WITH HEAT
DEFLECTOR

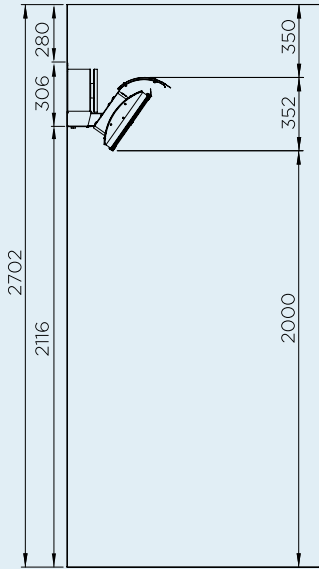


CEILING MOUNT
OPTIONS


CEILING POLE
CLEARANCE

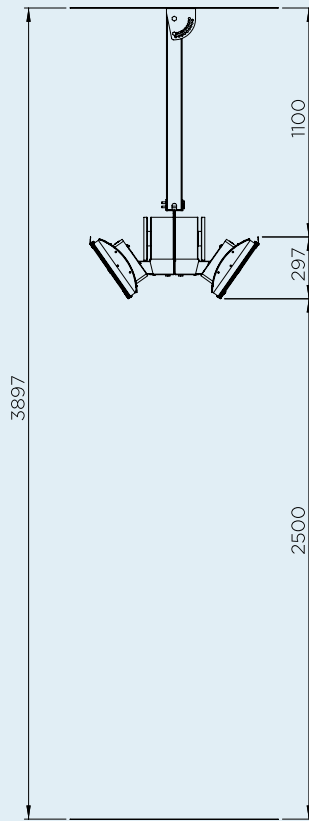

CEILING POLE
CLEARANCE
WITH HEAT
DEFLECTOR

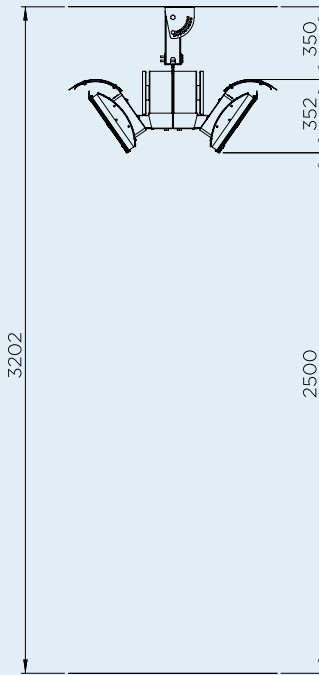

BRACKET
MEASUREMENTS



PLATINUM

SMART-HEAT™ ELECTRIC

MODEL NUMBER	2300W SERIES	3400W SERIES
FUEL TYPE	ELECTRIC	ELECTRIC
COLOUR	BLACK WHITE	BLACK WHITE
HEAT AREA	6M²	10M²
RATED CURRENT	220 - 240V/9.6A	220 - 240V/14.2A
MINIMUM FLOOR CLEARANCE	WALL 1800 CEILING 2400	WALL 1800 CEILING 2400


MOUNTING OPTIONS		
CEILING MOUNT	X	X
WALL MOUNT	X	X
RECESSED FLUSH MOUNT	X	X
CEILING POLE MOUNT	X	X
FREESTANDING	-	-

CONTROL OPTIONS		
ON OFF	X	X
DIMMER	X	X
MASTER REMOTE *	X	X


Measurements displayed within this catalogue are minimum requirements for installation.
Bromic takes no responsibility for incorrect or non-compliant installations.
All measurement in this catalogue are displayed in mm.

* Controls up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 30m of heaters..



CEILING RECESS FRAME 2300W

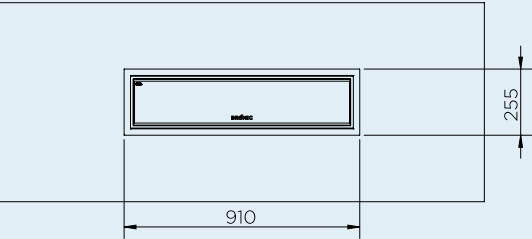



CEILING RECESS FRAME 3400W

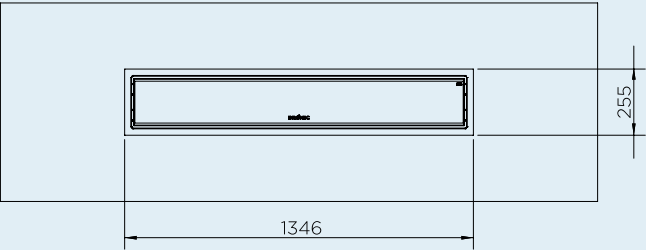


MINIMUM CAVITY OPTION 1

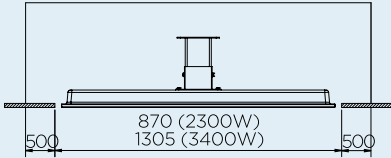


MINIMUM CAVITY OPTION 2

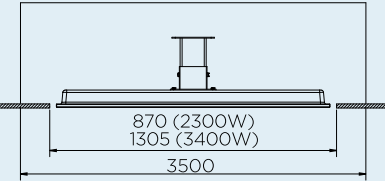


CEILING MOUNT
CLEARANCE

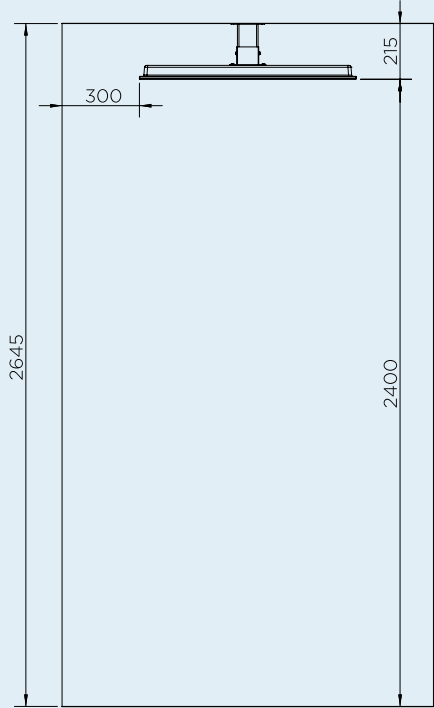


FRONT
DOWN MOUNT

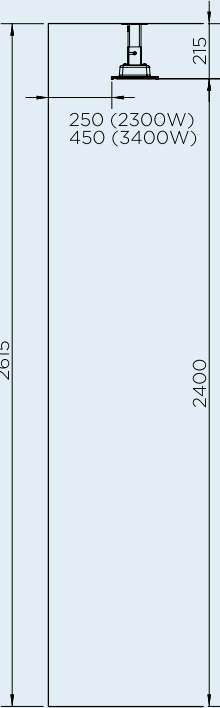


ANGLE
MOUNT

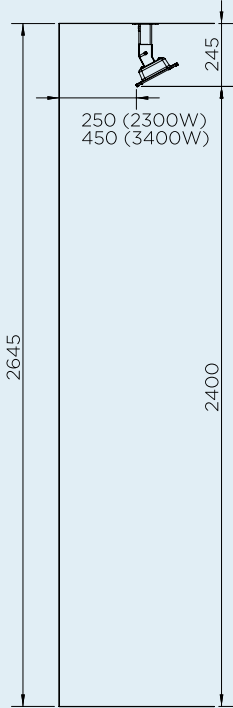


WALL MOUNT
CLEARANCE

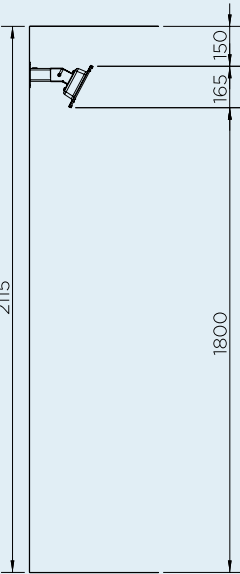


PRODUCT
MEASUREMENTS

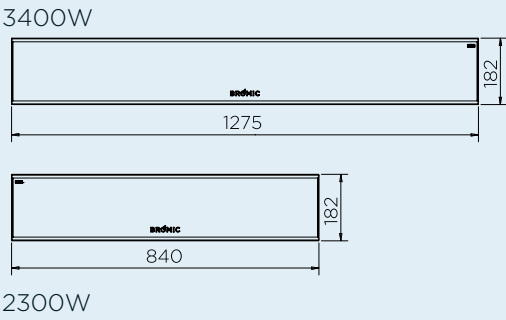

BRACKET
MEASUREMENTS

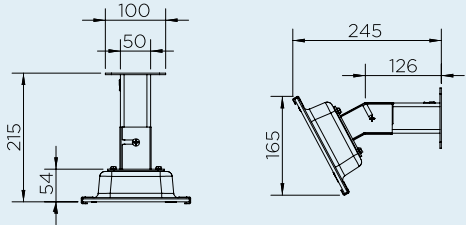

CEILING POLE
CLEARANCE

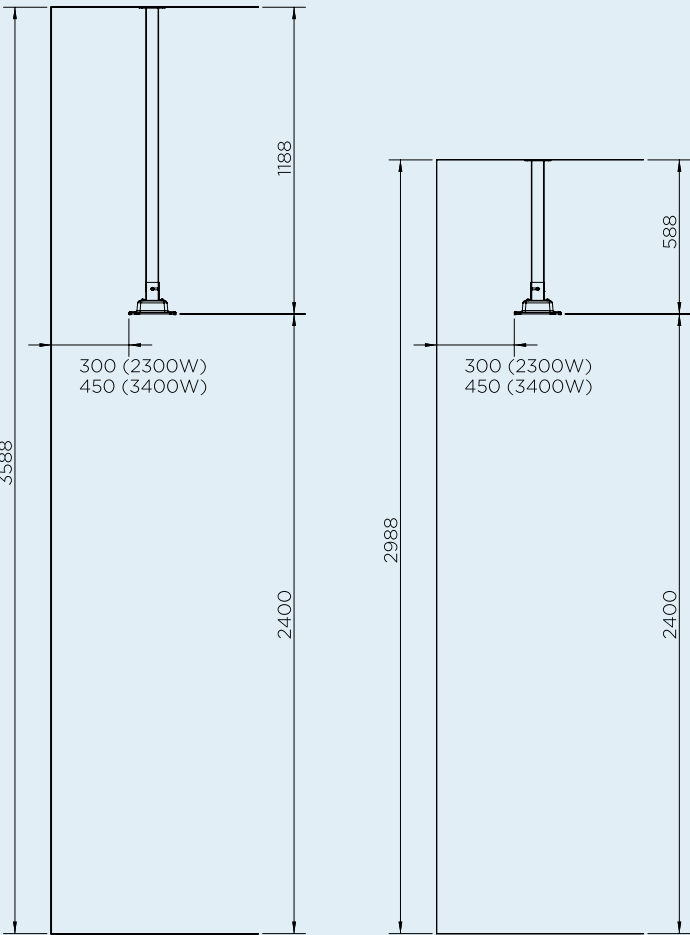

TUNGSTEN

SMART-HEAT™ GAS

MODEL NUMBER	300 SERIES	500 SERIES
FUEL TYPE	LPG NG	LPG NG
COLOUR	BLACK	BLACK
HEAT AREA	15M²	20M²
ELECTRICAL CONNECTION	220 - 240 Va.c.	220 - 240 Va.c
MINIMUM FLOOR CLEARANCE	2000MM	2000MM


MOUNTING OPTIONS		
CEILING MOUNT	X	X
WALL MOUNT	X	X
RECESSED FLUSH MOUNT	-	-
CEILING POLE MOUNT	X	X
FREESTANDING	-	-

CONTROL OPTIONS		
ON OFF	X	X
DIMMER	-	-
MASTER REMOTE	-	-



Measurements displayed within this catalogue are minimum requirements for installation.
Bromic takes no responsibility for incorrect or non-compliant installations.
All measurement in this catalogue are displayed in mm.

PRODUCT MEASUREMENTS

500 SERIES

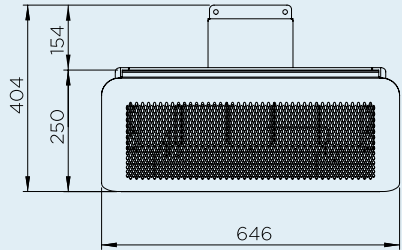


300 SERIES





PRODUCT MEASUREMENTS

WITH HEAT DEFLECTOR

500 SERIES

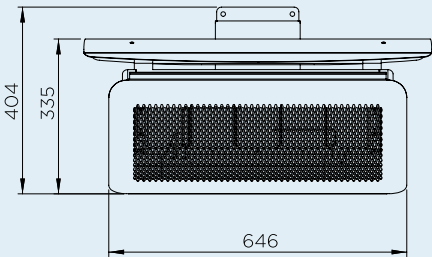

300 SERIES




WALL MOUNT

CLEARANCES

WALL MOUNT

CLEARANCE

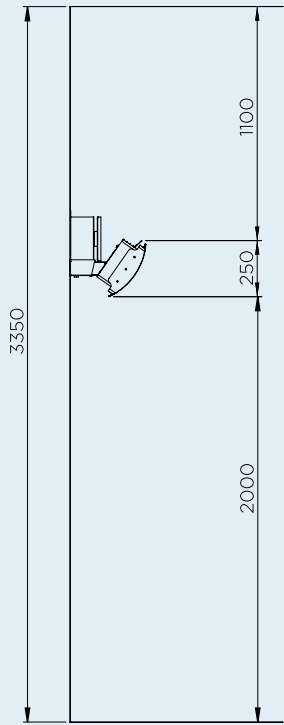


WALL MOUNT

CLEARANCE

WITH HEAT

DEFLECTOR

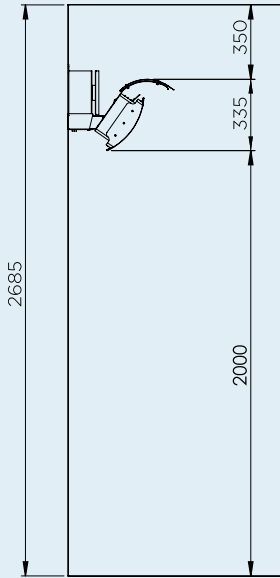


CEILING MOUNT

CLEARANCES

CEILING POLE

CLEARANCE

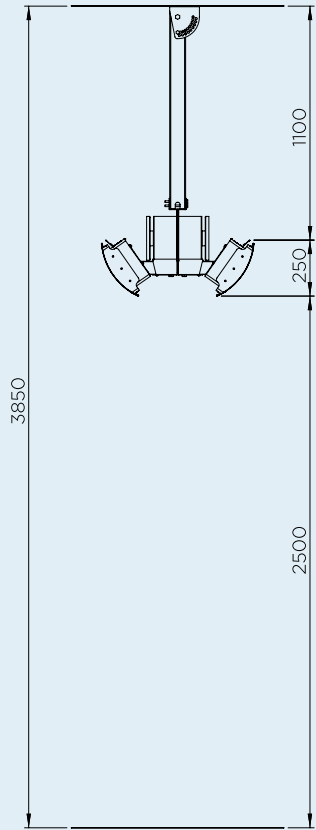


CEILING POLE

CLEARANCE


WITH HEAT

DEFLECTOR

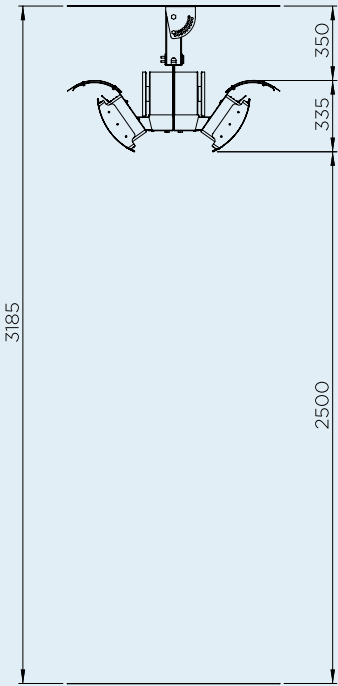

BRACKET

MEASUREMENTS



TUNGSTEN

SMART-HEAT™ ELECTRIC

MODEL NUMBER	2000 SERIES	3000 SERIES	4000 SERIES	6000 SERIES
FUEL TYPE	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
COLOUR	BLACK WHITE	BLACK WHITE	BLACK WHITE	BLACK WHITE
HEAT AREA	6M²	9M²	12M²	15M²
RATED CURRENT	220 - 240V/8.3A	220 - 240V/12.5A	220 - 240V/16.6A	220 - 240V/25A
MINIMUM FLOOR CLEARANCE	WALL 1800 MM CEILING 2400 MM		WALL 1800 MM CEILING 2400 MM	



MOUNTING OPTIONS				
CEILING MOUNT	X	X	X	X
WALL MOUNT	X	X	X	X
RECESSED FLUSH MOUNT	X	X	X	X
CEILING POLE MOUNT	X	X	X	X
FREESTANDING	-	-	-	-

CONTROL OPTIONS				
ON OFF	X	X	X	X
DIMMER	X	X	X	X
MASTER REMOTE *	X	X	X	X


Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this catalogue are displayed in mm.

* Control up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 30m of heaters.


CEILING RECESS FRAME

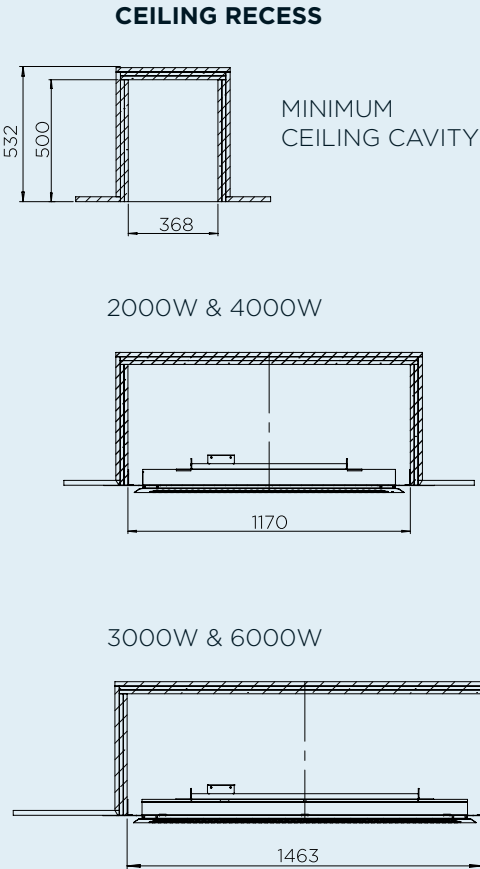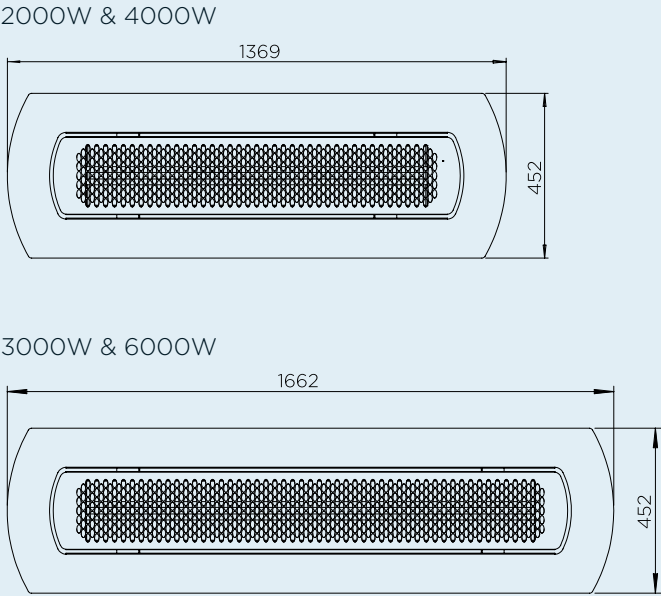


CEILING POLE
SUSPENSION CLEARANCE

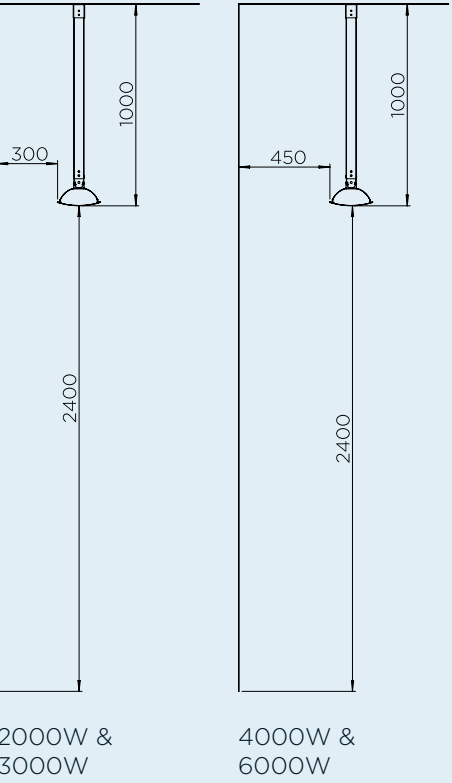


CEILING & WALL CLEARANCE
4000W & 6000W

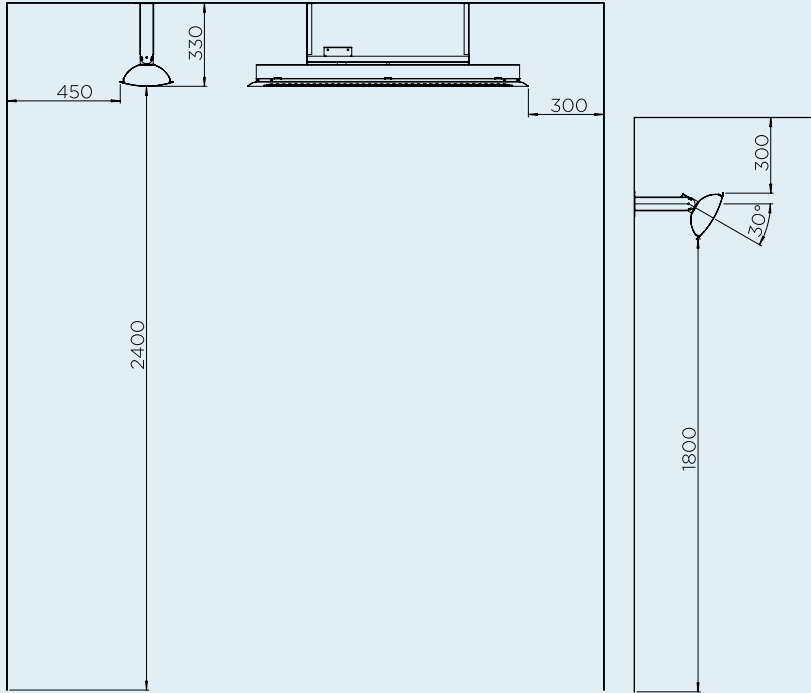


PRODUCT
MEASUREMENTS

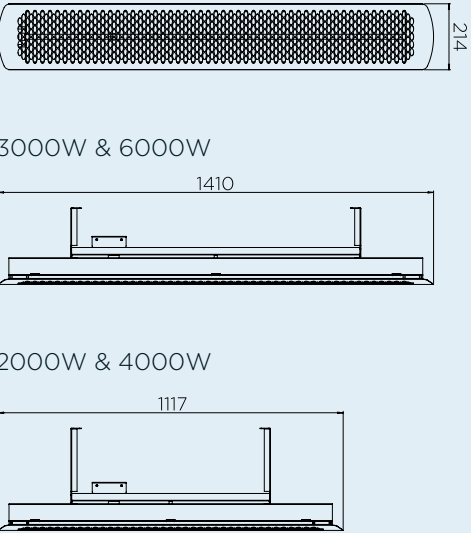

CEILING & WALL CLEARANCE
2000W & 3000W

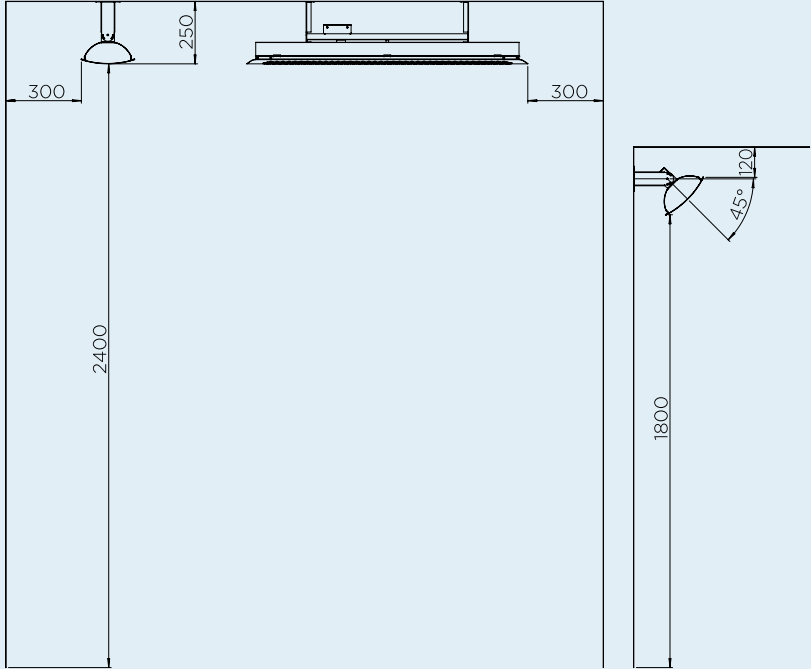

BRACKET
MEASUREMENTS

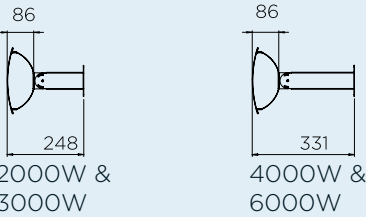

TUNGSTEN


SMART-HEAT™ PORTABLE

MODEL NUMBER	
FUEL TYPE	LPG
COLOUR	BLACK
HEAT AREA	20M²
ELECTRIC CONNECTION	-
MINIMUM CEILING CLEARANCE	1000MM


MOUNTING OPTIONS	
CEILING MOUNT	-
WALL MOUNT	-
RECESSED FLUSH MOUNT	-
CEILING POLE MOUNT	-
FREESTANDING	X

CONTROL OPTIONS	
ON OFF	-
DIMMER	-
MASTER REMOTE	-



Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this catalogue are displayed in mm.

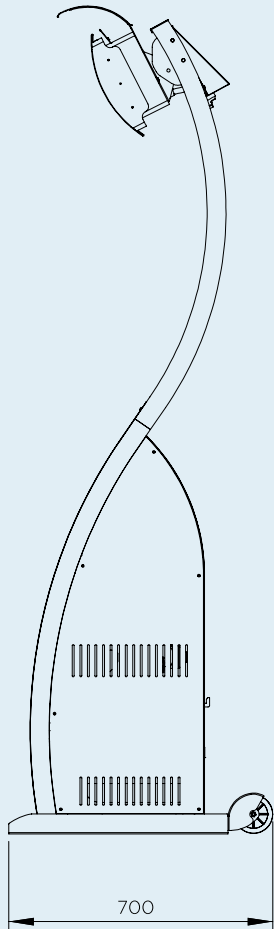

PRODUCT MEASUREMENTS

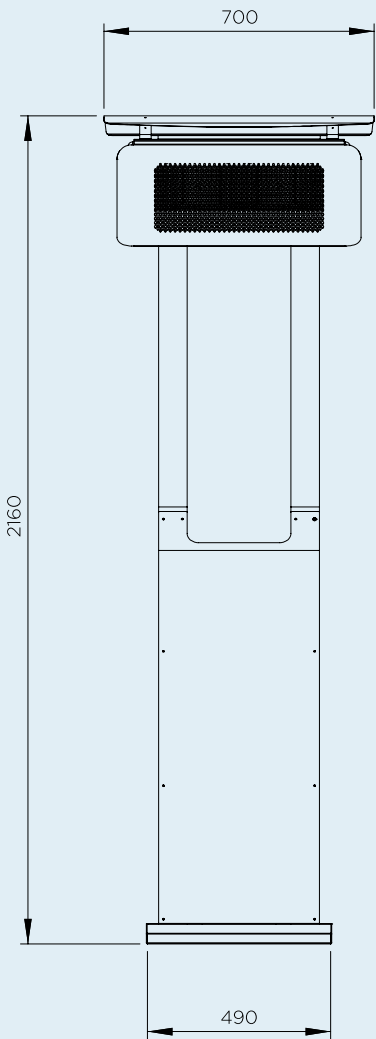

WALL & CEILING CLEARANCE

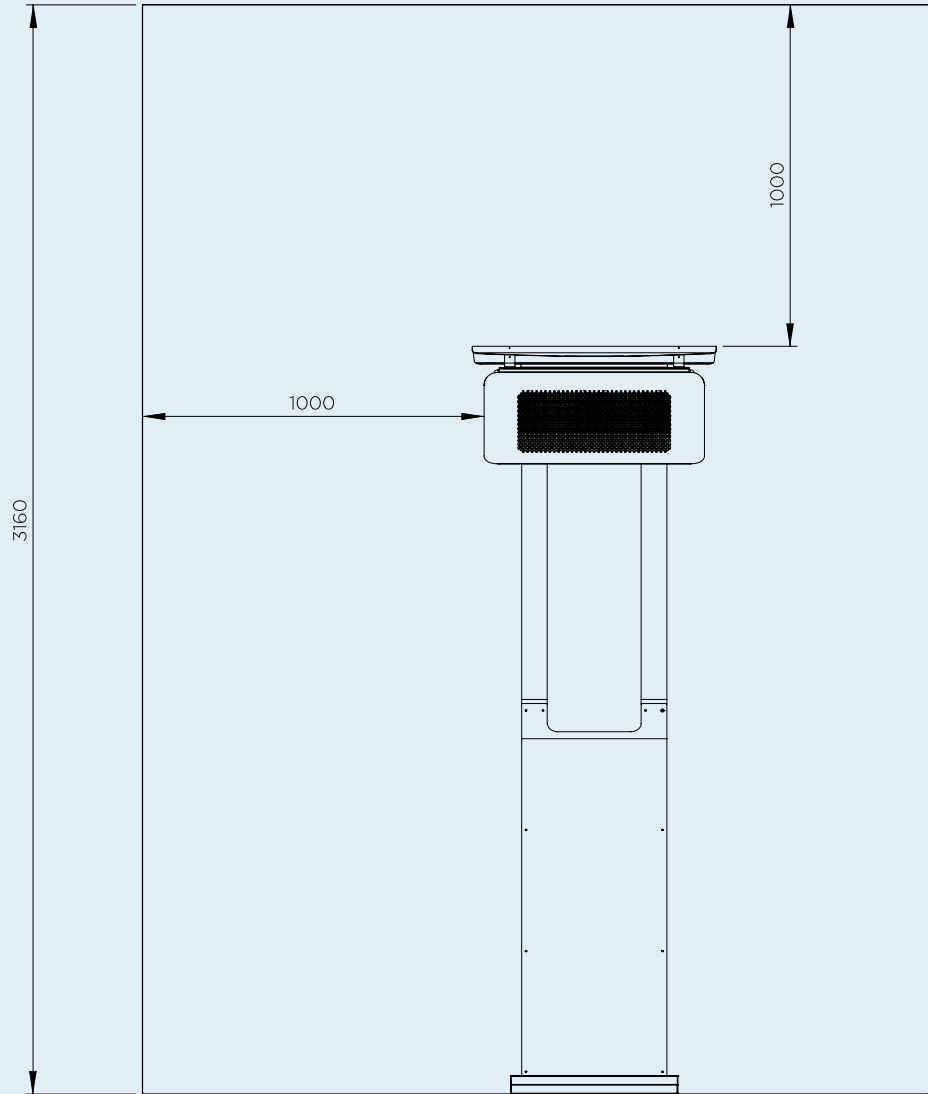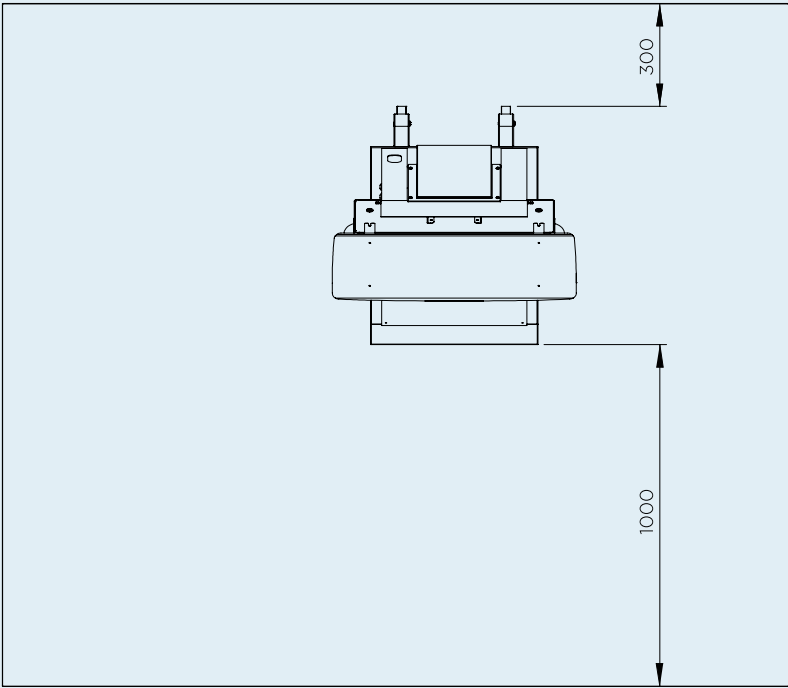



PLATINUM SMART-HEAT™ GAS
WITH OPTIONAL POLE MOUNT KIT

ABOUT **BROMIC GROUP**

Bromic's reputation for industry and innovation reaches back to 1978. Initially a supplier of gas components, Bromic has since grown to become an international leader that designs, manufactures and distributes a diverse range of quality, engineered products on a global scale.

CONTACT BROMIC

Asia Pacific

10 Phiney Place
Ingleburn Sydney NSW 2565 AUS
Tel. +61 2 9426 5222

North America

18 Technology Drive | STE 121
Irvine California 92618 USA
Tel. 1800 301 1293

Europe

Weinauallee 19
02763 Zittau Germany
Tel. +49 358 3518 9885

[BROMIC.COM/HEAT](https://bromic.com/HEAT)