


# TEAKWOOD

The Rolls-Royce among wooden parasols



# TEAKWOOD

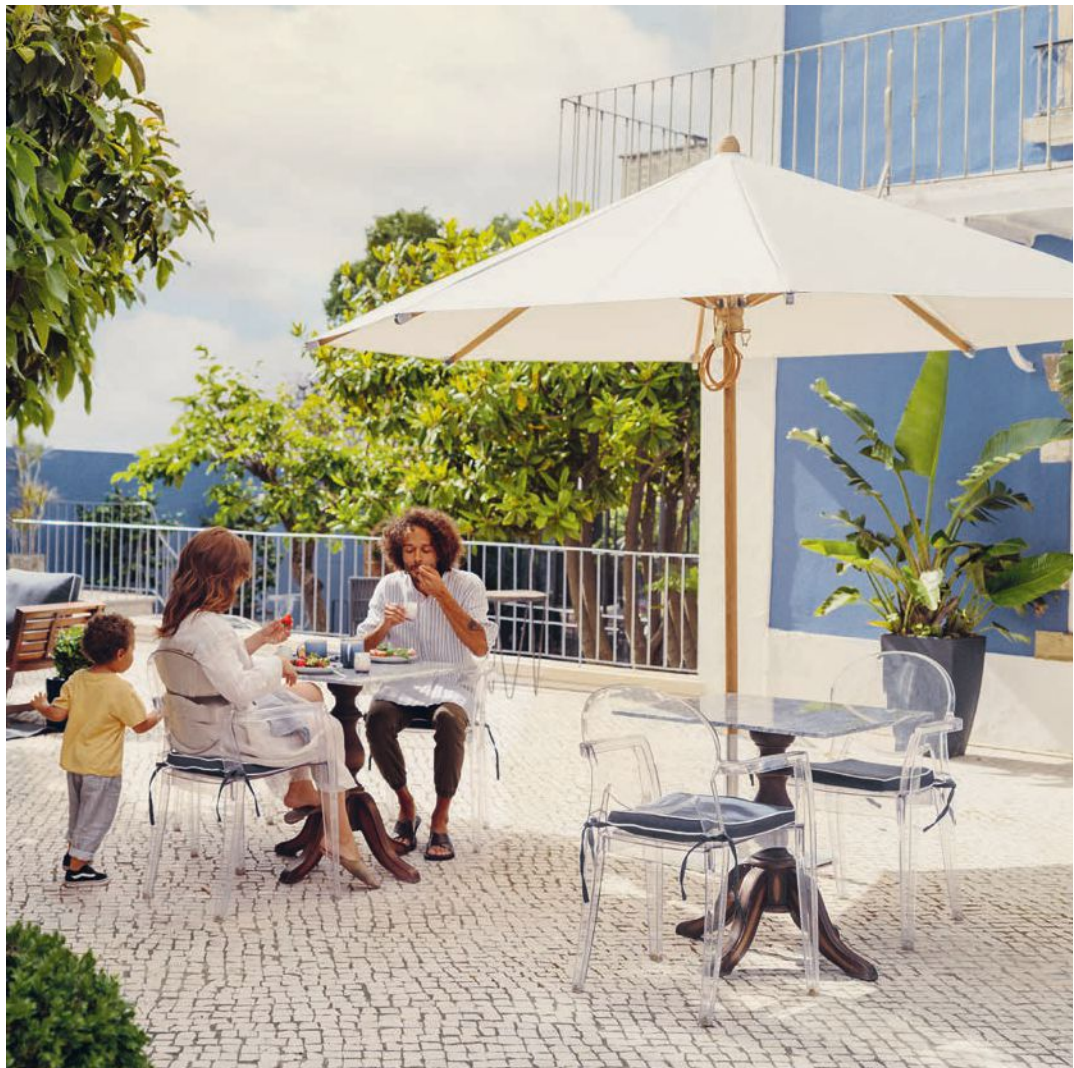

## Material and technology

<b>Frame:</b>	8 struts made of teak, continuous pole Ø 48 mm, with a double pulley to facilitate easy opening.
<b>Frame material:</b>	teak
<b>Frame shape:</b>	round or square
<b>Shade cover:</b>	with leather reinforcements, available in material class 5 (100 % polyacrylic approx. 300 g/m <sup>2</sup> ) or material class 4 (100 % polyester approx. 250 g/m <sup>2</sup> )
<b>Flounce:</b>	not available
<b>Protective cover:</b>	included in the standard equipment
<b>Note:</b>	The wood is supplied in a natural and therefore untreated state. The wood may secrete colourings and its own natural oils which may leave residues behind on a light coloured cover. This cannot be avoided and is therefore not admissible as a complaint.



Application



Fixation






# Assortment

Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Foundation	Minimum weight for base	max. wind speed open perm.	Order no. Frame teak
cm	cm	cm	m <sup>2</sup>	cm	cm	cm	cm	kg	km/h (wind force)	
A	AS	M	B	E	F	G	C			
○ without flounce										
Ø 300 <sup>8</sup>	275	4.8	6.4	135	220	285	60×60	40	30 (5)	166 00 300 731
Ø 350 <sup>8</sup>	325	4.8	8.7	105	215	285	60×60	55	30 (5)	166 00 350 731
□ without flounce										
330×330 <sup>8</sup>	-	4.8	10.9	45	220	285	60×60	70	30 (5)	166 00 331 731

<sup>8</sup> 8 parts

The listed measures represent extrapolated average values that may be slightly different on the product ( $\pm 2\% \pm 5$  cm).  
 The height dimensions are based on the ground socket PX. In the base variations these might differ slightly. Apart from the steel base minus 7.5 cm.  
 The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage.  
 In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

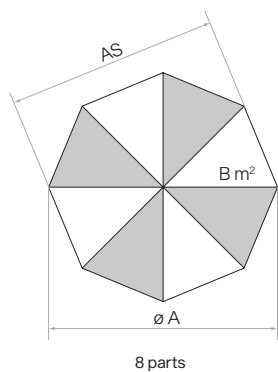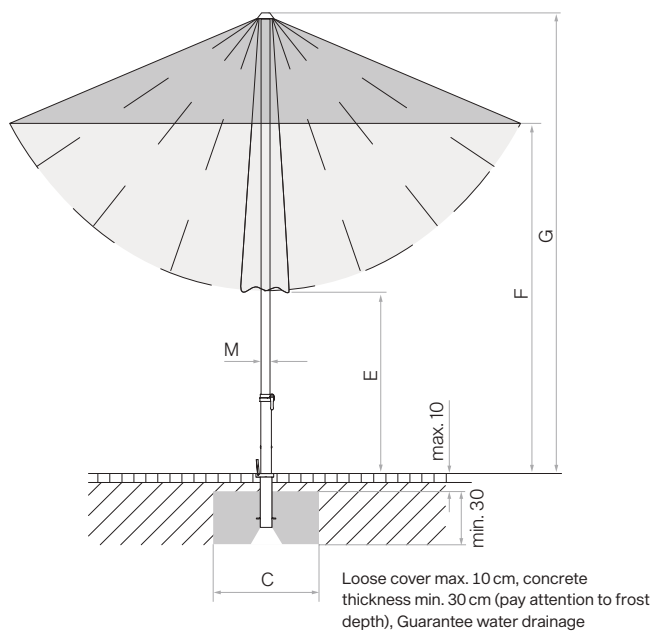

## Accessories

<b>Fixing option Z (support tube Z absolutely necessary)</b>		<b>Order no.</b>
1	Concrete base Z, 40 kg, Ø 60×8.5 cm	350 01 109 529
	1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60×8.5 cm	350 01 109 533
1	Concrete base Z, 55 kg, Ø 60×11 cm	350 01 109 528
	1 pallet (20 pieces) concrete base Z, 55 kg, Ø 60×11 cm	350 01 109 534
1	Concrete base Z, 70 kg, Ø 75×9 cm	350 01 109 527
2	<sup>3</sup> Granite base Z, 40 kg, 45×45×8 cm, natural stone, with castors and retractable handle	350 01 109 465
2	<sup>3</sup> Granite base Z, 55 kg, 55×55×9 cm, natural stone, with castors and retractable handle	350 01 109 445
3	Steel base Z, 40 kg, 58.5×58.5×2 cm, galvanised steel	350 01 100 210
	Add-on weight 30 kg, 57.5×57.5×1.7 cm, galvanised steel	350 01 100 310
4	Wall bracket Z, 180 mm, galvanised steel	350 01 205 000
5	Support tube Z, Ø 48 / 55 mm, galvanised steel	350 01 201 210
	Support tube Z, Ø 48 / 55 mm, galvanised steel, anthracite powder-coated	350 01 201 282
5	Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304	350 01 201 300
<b><sup>3</sup> Base with castors Z (support tube Z absolutely necessary)</b>		
6	Base with castors Z, 55 kg, 65×65×11 cm, cast concrete decor	350 01 102 900
	1 pallet (5 pieces) base with castors Z, 55 kg, Ø 65×65×11 cm, cast concrete decor	350 01 102 950
7	Base with castors Z, 90 kg, 80×80×12.5 cm, cast concrete decor	350 01 102 800
	1 pallet (5 pieces) base with castors Z, 90 kg, Ø 80×80×12.5 cm, cast concrete decor	350 01 102 850
<b>Fixing option PX (Connection tube PX absolutely necessary)</b>		
8	Ground socket PX, galvanised steel	350 01 207 001
8	Ground socket PX, high-grade steel 1.4301 / 304	350 01 207 011
9	Connection tube PX, Ø 48 / 55 mm, galvanised steel	350 01 206 001
10	Connection tube PX, Ø 48 / 55 mm, galvanised steel, anthracite powder-coated	350 01 206 082
9	Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304	350 01 206 011
<b>Protective cover made of coated, tear-resistant polyester fabric</b>		
11	Protective cover with zip and rod	350 01 609 979
<b>Miscellaneous items</b>		
12	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger	350 01 563 000
13	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger	350 01 563 100

<sup>3</sup> only suitable for smooth, joint free surface coverings



1 2 3 4 5 6 7 8 9 10



11 12 13





Glatz AG  
Parasols  
2022 Season

[glatz.com](https://www.glatz.com)

