



AMBIENTE Nova
Atmosphere also in the evening

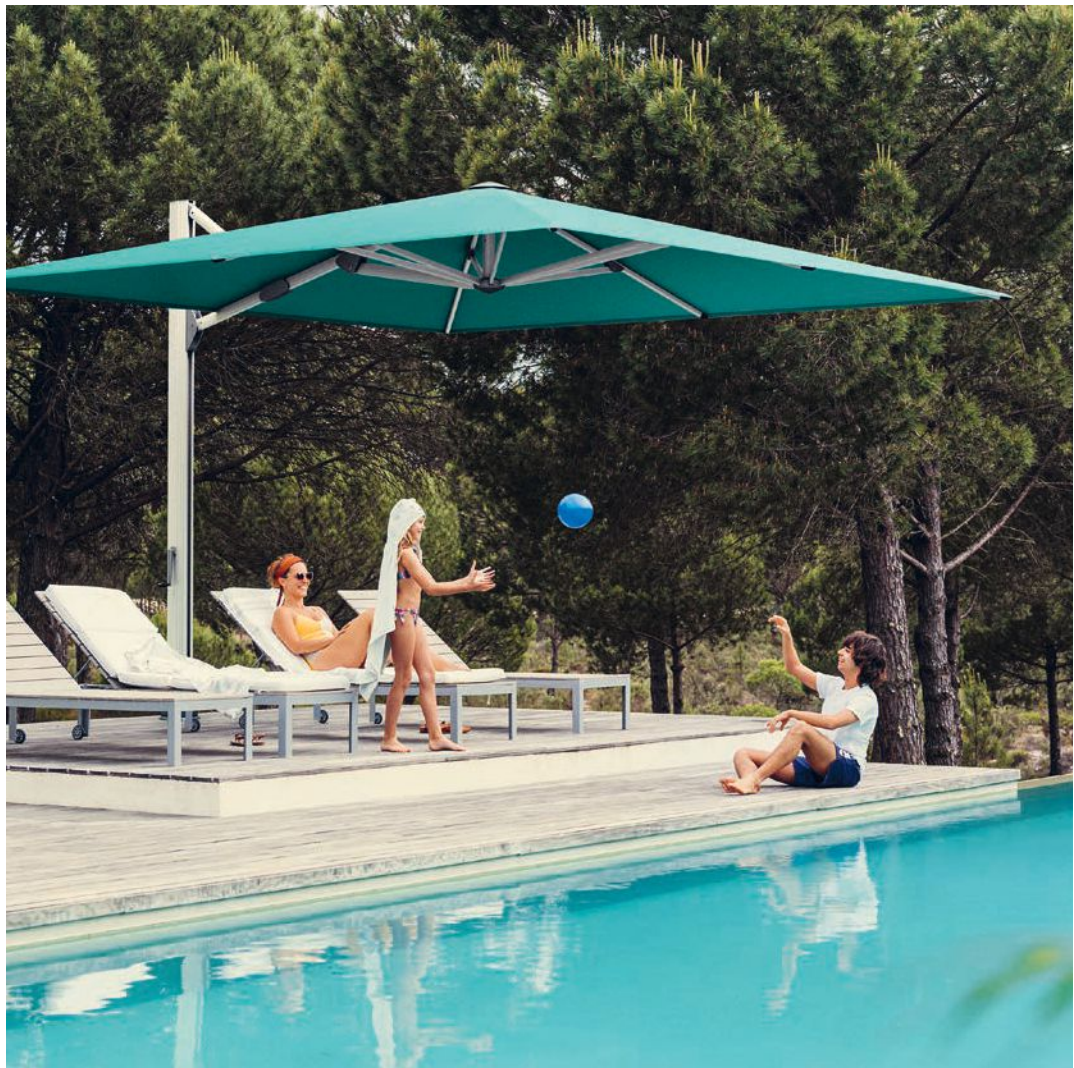

Glatz 

AMBIENTE Nova

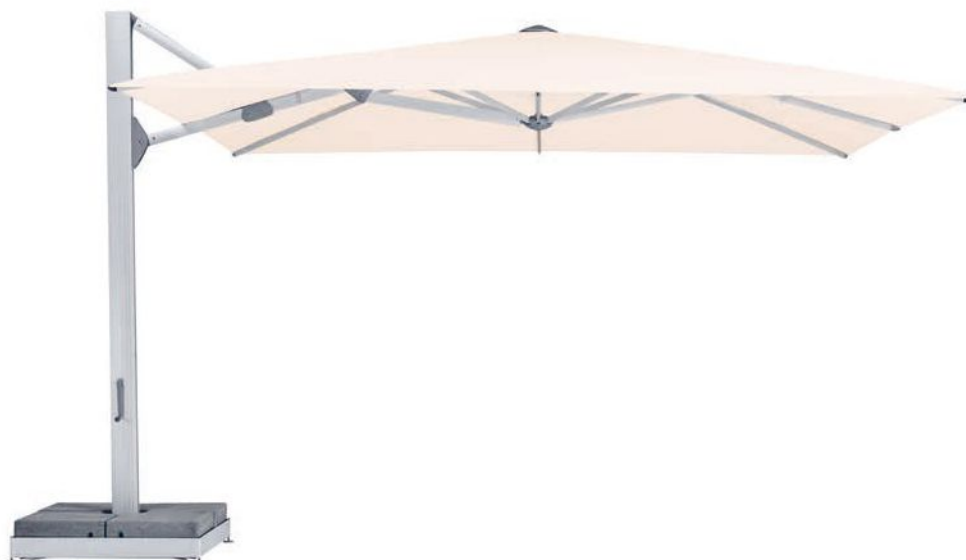

Material and technology

- Frame:** 8-part made from aluminium with crank drive. Patent pending opening mechanism for particularly high closing heights. Profiled pole profile, 85 × 145 mm. Wall thickness: 2–5 mm. Roof struts: 33 × 20 mm, with removable hand crank.
- Frame colour:** Anodised natural
Powder coating of parasol frames in anthracite RAL 7016, satin finish: no charge. Powder coating of parasol frames in other RAL colours: Price surcharge on request
- Frame shape:** round, rectangular or square
- Special sizes:** A wide variety of special sizes are available on request.
- Option:** LED lighting, infinitely dimmable, directly, indirectly and on the pole, colour temperature 2700 K (warm white), 4000-5500 lumens (depending on size). Motor drive for the greatest comfort, turnable base
- Shade cover:** available in material class 5 (100 % polyacrylic approx. 300 g/m²)
- Flounce:** available with or without flounce
- Protective cover:** optional



Application



Fixations

AMBIENTE Nova,
Int. Patents reg. © Int. Design reg.



Swiss
Made


Assortment


Nominal size	Order no. Frame anodized natural	Order no. Frame anodized natural
○	without flounce	with flounce
Ø 400 ⁸	105 00 400 171	105 00 400 170
Ø 500 ⁸	105 00 500 171	105 00 500 170
□		
400×300 ⁸	105 00 402 171	105 00 402 170
450×350 ⁸	105 00 452 171	105 00 452 170
□		
350×350 ⁸	105 00 351 171	105 00 351 170
400×400 ⁸	105 00 401 171	105 00 401 170

Nominal size	Lateral distance	Pole Ø	Area covered	Crank handle height	Height closed/with flounce	Lowest height when opening + closing/with flounce	Clear headroom/with flounce	Total height/Height of open pole	Length of free-arm	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M ¹	B	D	E ¹ /E ²	F ¹ /F ²	G ¹ /G ²	M ²	Z	C		
Ø 400 ⁸	370	8.5 × 14.5	11.3	91	158/134	148/124	225/201	365/295	232	80×80	240	45 (6)
Ø 500 ⁸	460	8.5 × 14.5	17.7	91	146/122	136/112	225/201	401/305	281	100×100	310	35 (6)
400×300 ⁸ -		8.5 × 14.5	12	91	80/56	70/46	225/201	334/270	184	80×80	240	45 (6)
450×350 ⁸ -		8.5 × 14.5	15.8	91	80/56	70/46	225/201	368/285	232	100×100	310	35 (6)
350×350 ⁸ -		8.5 × 14.5	12.3	91	92/68	82/58	225/201	343/285	213	80×80	240	40 (6)
400×400 ⁸ -		8.5 × 14.5	16	91	80/56	70/46	225/201	367/290	232	100×100	310	35 (6)


⁸ 8 parts

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm). If a minimum height underneath is required, this must be agreed with Glatz. The measures of the height are determined by the M4 ground socket. Depending on the base you choose, the listed measures change by the height of the corresponding base. The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage. In the presence of several parasols, the min. distance between one parasol and another and between parasols and walls shall be 25 cm.



 LED positions on the Ambiente Nova with LED



8 parts



8 parts

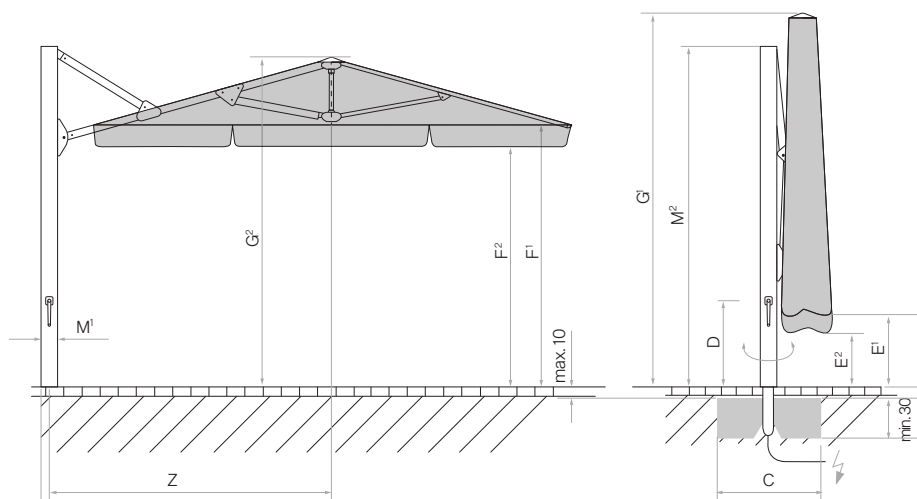

8 parts


Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), Guarantee water drainage, Supply line electric.

Accessories


Fixing option M4 / M8 / M16 (support tube M4 absolutely necessary)		Order no.
1	Base M4 / M8 / M16, 240-690 kg, 105 × 105 × 12–16 cm, galvanised steel, adjustable (price without concrete elements)	350 01 226 945
2	Mounting plate M4 / M8, 30 × 30 × 1.5 cm, galvanised steel	350 01 226 921
3	Cover for M4 / M8 / M16 base 240 kg, 110 × 110 × 12 cm, aluminium, powder coated light grey	350 01 227 417
4	Cover for M4 / M8 / M16 base 240 kg, 110 × 110 × 12 cm, aluminium, powder coated anthracite	350 01 227 430
3	Cover for M4 / M8 / M16 base 310 kg, 110 × 110 × 15 cm, aluminium, powder coated light grey	350 01 227 517
4	Cover for M4 / M8 / M16 base 310 kg, 110 × 110 × 15 cm, aluminium, powder coated anthracite	350 01 227 530
Fixing option M4 (support tube M4 absolutely necessary)		
5	Ground socket M4, galvanised steel	350 01 226 510
6	Mounting plate M4 special, for installation height 50 – 149 mm, galvanised steel	350 01 226 932
7	Mounting plate M4 special, for installation height 150 – 350 mm, galvanised steel	350 01 226 930
	Mounting plate M4 for isolated grounds, installation height made to measure, high-grade steel 1.4301 / 304	350 01 229 730
8	Wall console M4, extension 480 mm, galvanised steel	350 01 229 405
9	Wall console M4, extension 100 mm, galvanised steel	350 01 229 410
10	Support tube M4 for Ambiente Nova	350 01 227 080
	Swivel adapter M4 for M4, swiveling 310° (support tube necessary)	350 01 227 090
Concrete elements for base M4 / M8 / M16		
	Concrete element set, 4 × 48 kg, for 240 kg base, 48.3 × 48.3 × 9.4 cm, (approx. 192 kg), concrete	350 01 226 950
	Concrete element set, 4 × 65 kg, for 310 kg base, 48.3 × 48.3 × 12.6 cm, (approx. 260 kg), concrete	350 01 226 952
Protective cover made of coated, tear-resistant polyester fabric		
11	Protective cover with zip and rod for 345 × 80 cm	350 01 609 813
Electrical accessoires		
12	LED warm white, direct, indirect and on pole, dimmable, including Pz200 control (remote control absolutely necessary)	350 01 561 2XX
	Integral motor drive for Ambiente Nova, incl. Pz200 control (remote control absolutely necessary)	350 01 561 300
12	LED warm white and integral motor drive for Ambiente Nova, incl. Pz200 control (remote control absolutely necessary)	350 01 561 3XX
13	Remote control incl. wall bracket, IP20, 7-channel, black, labelled	350 01 555 310
Miscellaneous items		
14	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger	350 01 563 000
15	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger	350 01 563 100



1 2 3 4 5 6 7 8 9 10

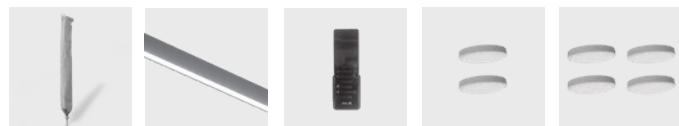

11 12 13 14 15

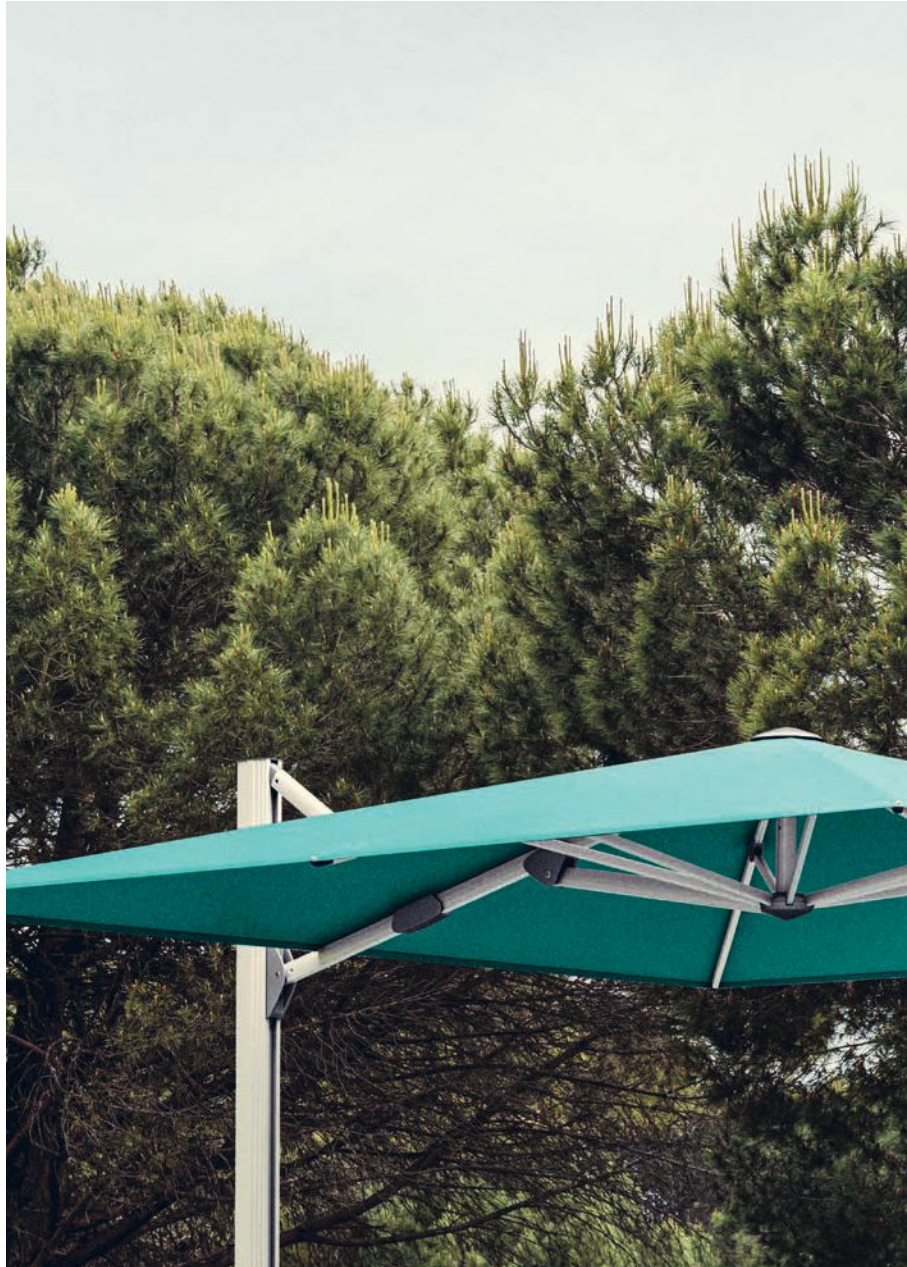



Glatz AG
Parasols
2022 Season

glatz.com

