

FORTERO®

The medium-sized, wind-resistant one



Glatz 

FORTERO®



Material and technology

Frame: 8-part made from aluminium, anodized natural, 100 % corrosion-resistant, screws and rivets made of stainless steel, two-part profiled mast 55×2.5 mm, counter-rotating opening principle for easy opening.

Frame colour: anodized natural

Frame shape: round, rectangular or square

Shade cover: * self-tautening thanks to the flexible strut ends, available in material class 5 (100 % polyacrylic approx. 300 g/m²), material class 4 (100 % polyester approx. 250 g/m²)

Flounce: not available

Protective cover: optional

* This model is also available in material class 2: Polyester, UV protection > 98%



Application



Fixations

FORTERO®,
© Int. Design reg.



Swiss
Design

Assortment

Nominal size Order no.
 Frame anodized natural

○	without flounce
Ø 350 ⁸	320 00 350 171

□	
300×200 ⁸	320 00 302 171
350×250 ⁸	320 00 352 171

□	
250×250 ⁸	320 00 251 171
300×300 ⁸	320 00 301 171
350×350 ⁸	320 00 351 171


Nominal size	Lateral distance	Mast Ø	Area covered	Height closed	Clear headroom	Total height	Height open	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m ²	cm	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	E	F	G	H	C		
Ø 350 ⁸	325	5.5	8.7	125	205	310	260	70×70	90	55 (7)
300×200 ⁸	-	5.5	6.0	120	205	310	260	70×70	70	60 (7)
350×250 ⁸	-	5.5	8.8	110	205	335	270	70×70	90	55 (7)
250×250 ⁸	-	5.5	6.3	110	205	295	255	70×70	70	70 (8)
300×300 ⁸	-	5.5	9.0	95	205	315	260	70×70	90	60 (7)
350×350 ⁸	-	5.5	12.3	85	205	345	270	80×80	120	50 (7)

⁸ 8 parts


The listed measures represent extrapolated average values that may be slightly different on the product (± 2% ± 5 cm).
 Height dimensions are based on ground socket M4. If one of the offered bases is used, these measures raise by 11.5 – 15.5 cm.
 Using PX ground socket with connecting tube leaves an additional 10.5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage.


In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

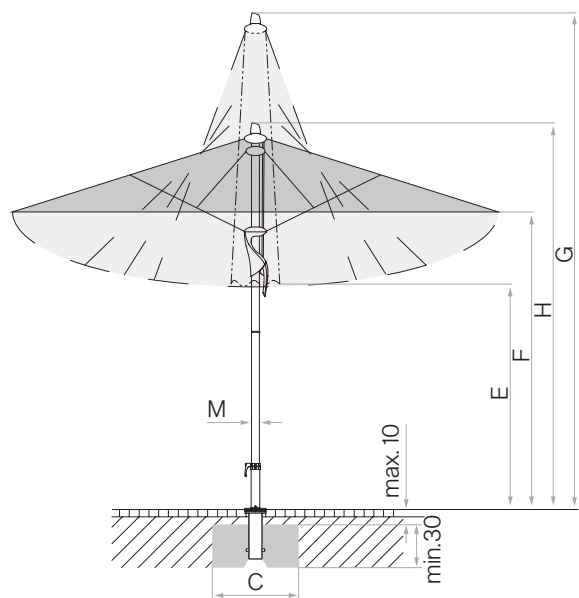


Loose cover max. 10 cm, concrete thickness min. 30 cm
 (pay attention to frost depth), Guarantee water drainage



8 parts



8 parts



8 parts



1 2 3



4 5 6 7 8 9 10 11 12 13

Accessories

Fixing option PX (Connection tube PX absolutely necessary)		Order no.
1	Ground socket PX, galvanised steel	350 01 207 001
1	Ground socket PX, high-grade steel 1.4301 / 304	350 01 207 011
2	Connection tube PX, Ø 48 / 55 mm, galvanised steel	350 01 206 001
2	Connection tube PX, Ø 48 / 55 mm, high-grade steel 1.4301 / 304	350 01 206 011
Fixing option Z (support tube Z absolutely necessary)		
3	Concrete base Z, 70 kg, Ø 75×9 cm	350 01 109 527
3	Concrete base Z, 90 kg, Ø 75×11 cm	350 01 109 523
	1 pallet (10 pieces) concrete base Z, 90 kg, Ø 75×11 cm	350 01 109 535
4	Natural granite base Z, 90 kg, 64×64×9 cm, natural stone	350 01 109 515
5	Steel base Z 40 kg, 58.5×58.5×2 cm, galvanised steel	350 01 100 210
	Add-on weight 30 kg, 57.5×57.5×1.7 cm, galvanised steel	350 01 100 310
6	Support tube Z, Ø 48 / 55 mm, galvanised steel	350 01 201 210
6	Support tube Z, Ø 48 / 55 mm, high-grade steel 1.4301 / 304	350 01 201 300
³ Base with castors Z or M4 (support tube Z or M4 absolutely necessary)		
7	Base with castors Z, 90 kg, 80×80×12.5 cm, cast concrete decor	350 01 102 800
	1 pallet (5 pieces) base with castors Z, 90 kg, Ø 80×80×12.5 cm, cast concrete decor	350 01 102 850
8	Base frame with castors M4, 150 kg, 80×80×14 cm, galvanised steel	350 01 103 000
	Cast concrete decor weights set, 4 pieces 25101104500 (approx. 125 kg) for 350 01 103 000	350 01 103 100
Fixing option M4 (support tube M4 absolutely necessary)		
9	Base M4, 120 kg, (for 8 plates 40×40×4 cm), 91×91×11.5 – 15.5 cm, galvanised steel (adjustable and levellable) (price without plates)	350 01 108 235
10	Cover for M4 base, 120 kg, 96×96×11.5 cm, plastic ABS coated, anodized aluminium look	350 01 100 617
11	Cover for M4 base, 120 kg, 96×96×11.5 cm, plastic ABS coated, anthracite	350 01 100 630
	Set of castors for base M4 (maximum weight 240 kg), Ø 5 cm, H= 5.5 cm, galvanised steel	350 01 100 500
12	³ Granite base M4, 120 kg, 90×90×17 cm, natural stone with castors	350 01 109 475
13	Ground socket M4, galvanised steel	350 01 226 510
14	Mounting plate M4 / M8, 30×30×1.5 cm, galvanised steel	350 01 226 921
15	Mounting plate M4 special, for installation height 50 – 149 mm, galvanised steel	350 01 226 932
16	Mounting plate M4 special, for installation height 150 – 350 mm, galvanised steel	350 01 226 930
	Mounting plate M4 for isolated grounds, installation height made to measure, high-grade steel 1.4301 / 304	350 01 229 730
17	Wall console M4, extension 480 mm, galvanised steel	350 01 229 405
18	Wall console M4, extension 100 mm, galvanised steel	350 01 229 410
19	Support tube M4, Ø 48 / 55 mm, galvanised steel	350 01 200 035
Slabs for base M4		
	Slab set, 8 pieces, 40×40×4 cm, (ca. 110 kg), concrete	350 01 226 908
	Slab set, 8 pieces, 40×40×4 cm, (ca. 115 kg), 4 pieces concrete, 4 pieces in granite-look	350 01 226 909
Protective cover made of coated, tear-resistant polyester fabric		
20	Protective cover with zip and rod	350 01 609 981
Miscellaneous items		
21	Bistro table (silvergrey)	350 01 900 100
22	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger	350 01 563 000
23	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger	350 01 563 100

³ only suitable for smooth, joint free surface coverings



14

15

16

17

18

19

20

21

22

23





Glatz AG
Parasols
2022 Season

[glatz.com](https://www.glatz.com)

